LSV6-08-2 NORP

二位二通电磁阀 常开型

说明 DESCRIPTION

A solenoid operated, 2-way, 2-position, normally open, poppet-type cartridge valve with reverse flow de-energized.

二位,二通,常开型座阀式电磁阀

工作 OPERATION

When de-energized, the poppet lifts to open flow from 2 to 1; Flow is also open from 1 to 2.

When energized ,the cartridge acts as a check valve, allowing flow from 1 to 2, while blocking flow from 2 to 1, after overcoming the solenoid force.

失电时, ②到①互通;

得电时,②到①关闭,当①口压力超过电磁铁力,①到②方向通。

手控应急 Operation of Manual Override Option

To override, push button in to activate. To return to normal valve function, release button. 请用工具按下并按住按钮,②到①关闭,松开按钮,返回常态。

SYMBOL

技术参数 SPECIFICATIONS


350bar
See PRESSURE DROP VS.FLOW graph.
3 drops/min.(滴/分) max. at 350bar
-40°F to +212°F(-40°C to +100°C)
rom 85% to 115% of nominal voltage(连续工作电压)
See page (参见) N-1
n viscosities of 7.4 to 420 cSt.(矿物油粘度)
08-2,See page M-1


阀块材料 (Body Material):

Steel & Ductile iron rated to 350bar 钢和球铁允许使用最大压力350bar



压力 - 流量曲线 PRESSURE DROP VS.FLOW

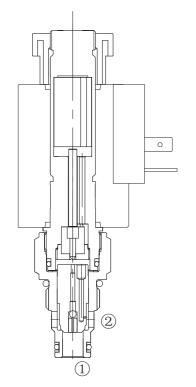

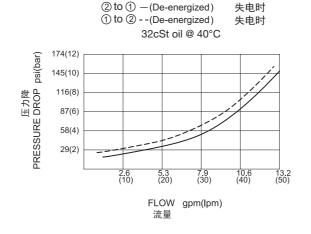



订货代号 TO ORDER



1 功能

LSV6= 电磁阀 Solenoid Valve

2 规格 Size 08=08 规格

3 流道类型 Flow Path 2= 二通

4 模式

NOR=常开,双向流通

Normally Open, Reverse Flow De-energized

5 类型

P= 锥阀型 Poppet

6 手控应急

空白 Blank= 无手控应急 None M= 手控应急 Manual Override

7 电压 Voltage

1=12 VDC 2=24 VDC 3=110 VAC 4=220 VAC 7=48 VDC 8=24 VAC 9=72 VDC 9 阀块油口 Body Porting 空白 Blank= 不带阀块 None 6T=SAE 6 3G=G 3/8

※ 阀块详见章节 K-1 其它螺纹油口也是可选择的 Other Porting Is Available

8 线圈连接 COIL CONNECTION

D= Double Lead 双线 H= Hirschmann 三插 B= Double Spade 双插 ER= Deutsch Connector (Water-proof Coil)

德意志插座(防水线圈) S= Single Lead 单线

安装尺寸 INSTALLATION DIMENSIONS

Coil Must Be Installed With Letter Up 安装线圈时,字母必须朝上。

Unit=Millimeters

